

Dubultstiepļu panelis 6/5/6 mm, tīkla acs izmēri 50 x 200 mm



Dubultstiepļu panelis 6/5/6 mm, tīkla acs izmēri 50 x 200 mm

Dubultstiepļu paneļiem ir augsta stabilitāte un izturība.

Šo augsto kvalitāti nodrošina izmantotie visaugstākās kvalitātes materiāli, kā arī to apstrāde, izmantojot vismūsdienīgākās ražošanas metodes. Izmantojot tievākas saskaršanās vietās sametinātas tērauda stieples, dubultais stiepļu panelis 6/5/6 piedāvā stabilu un rentablu absolūtas drošības risinājumu.

Tehniskie parametri:

- Horizontālās stieples: 2 x Ø 6 mm
- Vertikālās stieples: 1 x Ø 5 mm
- Garums: 2,508 mm
- Augstums: skatīt svara tabulu
- Tīkla acs izmēri: 50 x 200 mm

Protams, pēc pieprasījuma ir pieejami arī citi izmēri

Iespējamie pārklājumi:

- Dabīgā krāsa
- Cinkota stieple ar papildu poliestera pulverkrāsas pārklājumu
- Karsti cinkots saskaņā ar EN ISO 1461
- Karsti cinkots saskaņā ar EN ISO 1461 un ar papildu poliestera pulverkrāsas pārklājumu
- Standarta krāsas: RAL 6005, 6009, 7016 & 9005, citas krāsas - pēc pieprasījuma

• Kvalitāte, ko var atļauties

• Izturība

• Ar papildu garumu vai bez tā
paneļa augšpusē

• Pieejamas visas RAL krāsas

• Viegla un ātra uzstādīšana mūsu
dažādajās žogu stabiņu sistēmās

• Dažāds augstums nelīdzenai zemei

• Viegli kombinējams ar mūsu
durvīm un vārtiem

• Ļoti laba cenas un kvalitātes attiecība

Svara tabula

Augstums	Tīrs	Cinkots	Cinkots ar pārklājumu
630 mm	8.1 kg	8.7 kg	8.9 kg
830 mm	10.4 kg	11.1 kg	11.4 kg
1,030 mm	12.7 kg	13.6 kg	14.0 kg
1,230 mm	15.0 kg	16.1 kg	16.5 kg
1,430 mm	17.3 kg	18.5 kg	19.0 kg
1,630 mm	19.6 kg	21.0 kg	21.6 kg
1,830 mm	21.9 kg	23.4 kg	24.1 kg
2,030 mm	24.2 kg	25.9 kg	26.6 kg
2,230 mm	26.5 kg	28.4 kg	29.2 kg
2,430 mm	28.8 kg	30.8 kg	31.7 kg

Double wire panel 6/5/6, mesh size 50 x 200 mm



Double wire panel 6/5/6, mesh size 50 x 200 mm

The double wire panels excel both in stability and durability.

This high quality is ensured by the use of top-quality materials and their careful processing using state-of-the-art production techniques. By using thinner steel wires, welded at the interfaces, the double wire panel 6/5/6 offers a stable as well as cost-efficient solution for absolute security.

Technical specifications:

- Horizontal wires: 2 x ø 6 mm
- Vertical wires: 1 x ø 5 mm
- Length: 2,508 mm
- Height: see weight table
- Mesh size: 50 x 200 mm

Obviously, other sizes, mesh sizes and lengths are available at request.

Possible surface treatments:

- Self coloured
- Pre-galvanised wire with additional polyester powder coating
- Hot-dip galvanised according to EN ISO 1461
- Hot-dip galvanised according to EN ISO 1461 with additional polyester powder coating
- Standard colours: RAL 6005, 6009, 7016 & 9005, other colours available at request

• Affordable quality

• Durable

• With or without excess length on top

• All RAL colours available

• Easy and fast assembly with our various fence post systems

• Variable height gradation for uneven grounds

• Can be easily combined with our doors and gates

• Very good price/quality ratio

Weight table

Height	Blank	Galvanised	Galvanised + coated
630 mm	8.1 kg	8.7 kg	8.9 kg
830 mm	10.4 kg	11.1 kg	11.4 kg
1,030 mm	12.7 kg	13.6 kg	14.0 kg
1,230 mm	15.0 kg	16.1 kg	16.5 kg
1,430 mm	17.3 kg	18.5 kg	19.0 kg
1,630 mm	19.6 kg	21.0 kg	21.6 kg
1,830 mm	21.9 kg	23.4 kg	24.1 kg
2,030 mm	24.2 kg	25.9 kg	26.6 kg
2,230 mm	26.5 kg	28.4 kg	29.2 kg
2,430 mm	28.8 kg	30.8 kg	31.7 kg

Dubultstiepļu panelis 8/6/8 mm, tīkla acs izmēri 25 x 200 mm



Dubultstiepļu panelis 8/6/8 mm, tīkla acs izmēri 25 x 200 mm

Dubultstiepļu paneļiem ir augsta stabilitāte un izturība.

Šo augsto kvalitāti nodrošina izmantotie visaugstākās kvalitātes materiāli, kā arī to apstrāde, izmantojot vismūsdienīgākās ražošanas metodes. Dubultais stiepļu panelis 8/6/8 (tīkla acs izmēri 25 x 200 mm) izcils profesionāls risinājums nelaimes gadījumu novēršanai rūpniecības iekārtu tuvumā un kā augstas kvalitātes, necaurejams drošības žogs – piedāvā izcilu aizsardzību pret jebkuru nevēlamu piekļuvi.

Tehniskie parametri:

· Horizontālās stieples	2 x ø 8 mm
· Vertikālās stieples:	1 x ø 6 mm
· Garums:	2,508 mm
· Augstums:	skatīt svara tabulu
· Tīkla acs izmēri	25 x 200 mm

Protams, pēc pieprasījuma ir pieejami arī citi izmēri.

Iespējamie pārklājumi:

- Dabīgā krāsa
 - Cinkota stieple ar papildu poliestera pulverkrāsas pārklājumu
 - Karsti cinkots saskaņā ar EN ISO 1461
 - Karsti cinkots saskaņā ar EN ISO 1461 un ar papildu poliestera pulverkrāsas pārklājumu
- Standarta krāsas: RAL 6005, 6009, 7016 & 9005, citas krāsas - pēc pieprasījuma

· Augsta drošība

· Izturība

· Augstas kvalitātes, necaurejams drošības žogs

· Ar papildu garumu vai bez tā paneļa augšpusē

· Pieejamas visas RAL krāsa

· Viegla un ātra uzstādīšana mūsu dažādajās žogu stabiņu sistēmās

· Dažāds augstums nelīdzenai zemei

· Viegli kombinējams ar mūsu durvīm un vārtiem

· Ļoti laba cenas un kvalitātes attiecība

Svara tabula

Augstums	Tīrs	Cinkots	Cinkots ar pārklājumu
630 mm	19.5 kg	20.9 kg	21.5 kg
830 mm	25.1 kg	26.9 kg	27.6 kg
1,030 mm	30.8 kg	33.0 kg	33.9 kg
1,230 mm	36.5 kg	39.1 kg	40.2 kg
1,430 mm	42.2 kg	45.2 kg	46.4 kg
1,630 mm	47.9 kg	51.3 kg	52.7 kg
1,830 mm	53.6 kg	57.4 kg	59.0 kg
2,030 mm	59.3 kg	63.5 kg	65.2 kg
2,230 mm	65.0 kg	69.6 kg	71.5 kg
2,430 mm	70.7 kg	75.6 kg	77.8 kg

Double wire panel 8/6/8, mesh size 25 x 200 mm



Double wire panel 8/6/8, mesh size 25 x 200 mm

The double wire panels excel both in stability and durability.

This high quality is ensured by the use of top-quality materials and their careful processing using state-of-the-art production techniques. The double wire panel 8/6/8 (mesh size 25 x 200 mm) is the professional solution par excellence for accident prevention near industrial machines and – as high-quality, impenetrable security fence – offers excellent protection against all unwanted access.

Technical specifications:

- Horizontal wires: 2 x ø 8 mm
- Vertical wires: 1 x ø 6 mm
- Length: 2,508 mm
- Height: see weight table
- Mesh size: 25 x 200 mm

Obviously, other sizes, mesh sizes and lengths are available at request.

Possible surface treatments:

- Self coloured
 - Pre-galvanised wire with additional polyester powder coating
 - Hot-dip galvanised according to EN ISO 1461
 - Hot-dip galvanised according to EN ISO 1461 with additional polyester powder coating
- Standard colours: RAL 6005, 6009, 7016 & 9005, other colours available at request

- High security
- Durable
- High-quality, impenetrable security fence
- With or without excess length on top
- All RAL colours available
- Easy and fast assembly with our various fence post systems
- Variable height gradation for uneven grounds
- Can be easily combined with our doors and gates
- Very good price/quality ratio

Weight table

Height	Blank	Galvanised	Galvanised + coated
630 mm	19.5 kg	20.9 kg	21.5 kg
830 mm	25.1 kg	26.9 kg	27.6 kg
1,030 mm	30.8 kg	33.0 kg	33.9 kg
1,230 mm	36.5 kg	39.1 kg	40.2 kg
1,430 mm	42.2 kg	45.2 kg	46.4 kg
1,630 mm	47.9 kg	51.3 kg	52.7 kg
1,830 mm	53.6 kg	57.4 kg	59.0 kg
2,030 mm	59.3 kg	63.5 kg	65.2 kg
2,230 mm	65.0 kg	69.6 kg	71.5 kg
2,430 mm	70.7 kg	75.6 kg	77.8 kg

Dubultstiepļu panelis 8/6/8 mm, tīkla acs izmēri 50 x 200 mm



Dubultstiepļu panelis 8/6/8 mm, tīkla acs izmēri 50 x 200 mm

Dubultstiepļu paneļiem ir augsta stabilitāte un izturība.

Šo augsto kvalitāti nodrošina izmantotie visaugstākās kvalitātes materiāli, kā arī to apstrāde, izmantojot vismūsdienīgākās ražošanas metodes. Dubultais stiepļu panelis 8/6/8 ir ārkārtīgi drošs pret vandālismu, un tērauda stiepļu saskaršanās vietu metinājums nodrošina atbilstību augstam drošības standartam.

Techniskie parametri:

- Horizontālās stieples: 2 x Ø 8 mm
- Vertikālās stieples: 1 x Ø 6 mm
- Garums: 2,508 mm
- Augstums: skatīt svara tabulu
- Tīkla acs izmēri: 50 x 200 mm

Protams, pēc pieprasījuma ir pieejami arī citi izmēri.

Iespējamie pārklājumi:

- Dabīgā krāsa
- Cinkota stieple ar papildu poliestera pulverkrāsas pārklājumu
- Karsti cinkots saskaņā ar EN ISO 1461
- Karsti cinkots saskaņā ar EN ISO 1461 un ar papildu poliestera pulverkrāsas pārklājumu
- Standarta krāsas: RAL 6005, 6009, 7016 & 9005, citas krāsas - pēc pieprasījuma

• Augstākās kvalitātes izstrādājums

• Ar papildu garumu vai bez tā paneļa augšpusē

• Pieejamas visas RAL krāsas

• Izturība

• Viegla un ātra uzstādīšana mūsu dažādajās žogu stabiņu sistēmās

• Dažāds augstums nelīdzenai zemei

• Viegli kombinējams ar mūsu durvīm un vārtiem

• Ļoti laba cenas un kvalitātes attiecība

Svara tabula

Augstums	Tīrs	Cinkots	Cinkots ar pārklājumu
630 mm	13.4 kg	14.3 kg	14.7 kg
830 mm	17.1 kg	18.3 kg	18.8 kg
1,030 mm	20.9 kg	22.3 kg	22.9 kg
1,230 mm	24.6 kg	26.3 kg	27.1 kg
1,430 mm	28.4 kg	30.4 kg	31.2 kg
1,630 mm	32.1 kg	34.4 kg	35.3 kg
1,830 mm	35.9 kg	38.4 kg	39.5 kg
2,030 mm	39.6 kg	42.4 kg	43.6 kg
2,230 mm	43.4 kg	46.4 kg	47.7 kg
2,430 mm	47.2 kg	50.5 kg	51.9 kg

Double wire panel 8/6/8, mesh size 50 x 200 mm



Double wire panel 8/6/8, mesh size 50 x 200 mm

The double wire panels excel both in stability and durability.

This high quality is ensured by the use of top-quality materials and their careful processing using state-of-the-art production techniques. The double wire panel 8/6/8 is extremely vandal-proof and the welding of the steel wire interfaces ensures a high security standard.

Technical specifications:

- Horizontal wires: 2 x ø 8 mm
- Vertical wires: 1 x ø 6 mm
- Length: 2,508 mm
- Height: see weight table
- Mesh size: 50 x 200 mm

Obviously, other sizes, mesh sizes and lengths are available at request.

Possible surface treatments:

- Self coloured
- Pre-galvanised wire with additional polyester powder coating
- Hot-dip galvanised according to EN ISO 1461
- Hot-dip galvanised according to EN ISO 1461 with additional polyester powder coating
- Standard colours: RAL 6005, 6009, 7016 & 9005, other colours available at request

• Top-quality product

• With or without excess length on top

• All RAL colours available

• Durable

• Easy and fast assembly with our various fence post systems

• Variable height gradation for uneven grounds

• Can be easily combined with our doors and gates

• Very good price/quality ratio

Weight table

Height	Blank	Galvanised	Galvanised + coated
630 mm	13.4 kg	14.3 kg	14.7 kg
830 mm	17.1 kg	18.3 kg	18.8 kg
1,030 mm	20.9 kg	22.3 kg	22.9 kg
1,230 mm	24.6 kg	26.3 kg	27.1 kg
1,430 mm	28.4 kg	30.4 kg	31.2 kg
1,630 mm	32.1 kg	34.4 kg	35.3 kg
1,830 mm	35.9 kg	38.4 kg	39.5 kg
2,030 mm	39.6 kg	42.4 kg	43.6 kg
2,230 mm	43.4 kg	46.4 kg	47.7 kg
2,430 mm	47.2 kg	50.5 kg	51.9 kg

Dubultstiepļu panelis 8/6/8 mm, tīkla acs izmēri 100 x 200 mm

Dubultstiepļu panelis 8/6/8 mm, tīkla acs izmēri 100 x 200 mm

Dubultstiepļu paneliem ir augsta stabilitāte un izturība.

Šo augsto kvalitāti nodrošina izmantotie visaugstākās kvalitātes materiāli, kā arī to apstrāde, izmantojot vismūsdienīgākās ražošanas metodes. Dubultais stiepļu panelis 8/6/8 (tīkla acs izmēri 100 x 200 mm) ir profesionāls līdz pat 8 metrus augstu spēļu bumbu aizturēšanas žogu risinājums. Kopā ar klasisko dubulto stiepļu paneli 8/6/8 (tīkla acs izmēri 50 x 200 mm) tas nodrošina maksimālu drošību un funkcionalitāti.

Technical specifications:

- Horizontālās stieples: 2 x Ø 8 mm
- Vertikālās stieples: 1 x Ø 6 mm
- Garums: 2,508 mm
- Augstums: skatīt svara tabulu
- Tīkla acs izmēri: 100 x 200 mm

Protams, pēc pieprasījuma ir pieejami arī citi izmēri.

Protams, pēc pieprasījuma ir pieejami arī citi izmēri.

- Dabīgā krāsa
- Cinkota stieple ar papildu poliestera pulverkrāsas pārklājumu
- Karsti cinkots saskaņā ar EN ISO 1461
- Karsti cinkots saskaņā ar EN ISO 1461 un ar papildu poliestera pulverkrāsas pārklājumu
- Standarta krāsas: RAL 6005, 6009, 7016 & 9005, citas krāsas - pēc pieprasījuma

• Ideāls spēļu bumbu aizturēšanas žogs

• Pieejamas visas RAL krāsas

• Ar papildu garumu vai bez tā paneļa augšpusē

• Izturība

• Viegla un ātra uzstādīšana mūsu dažādajās žogu stabiņu sistēmās

• Dažāds augstums nelīdzenai zemei


• Viegli kombinējams ar mūsu durvīm un vārtiem

• Ļoti laba cenas un kvalitātes attiecība

Svara tabula

Augstums	Tīrs	Cinkots	Cinkots ar pārklājumu
630 mm	10.3 kg	11.0 kg	11.3 kg
830 mm	13.1 kg	14.0 kg	14.4 kg
1,030 mm	15.9 kg	17.0 kg	17.5 kg
1,230 mm	18.7 kg	20.0 kg	20.5 kg
1,430 mm	21.5 kg	23.0 kg	23.6 kg
1,630 mm	24.3 kg	26.0 kg	26.7 kg
1,830 mm	27.1 kg	28.9 kg	29.8 kg
2,030 mm	29.9 kg	32.0 kg	32.9 kg
2,230 mm	32.7 kg	35.0 kg	36.0 kg
2,430 mm	35.5 kg	38.0 kg	39.1 kg

Double wire panel 8/6/8, mesh size 100 x 200 mm

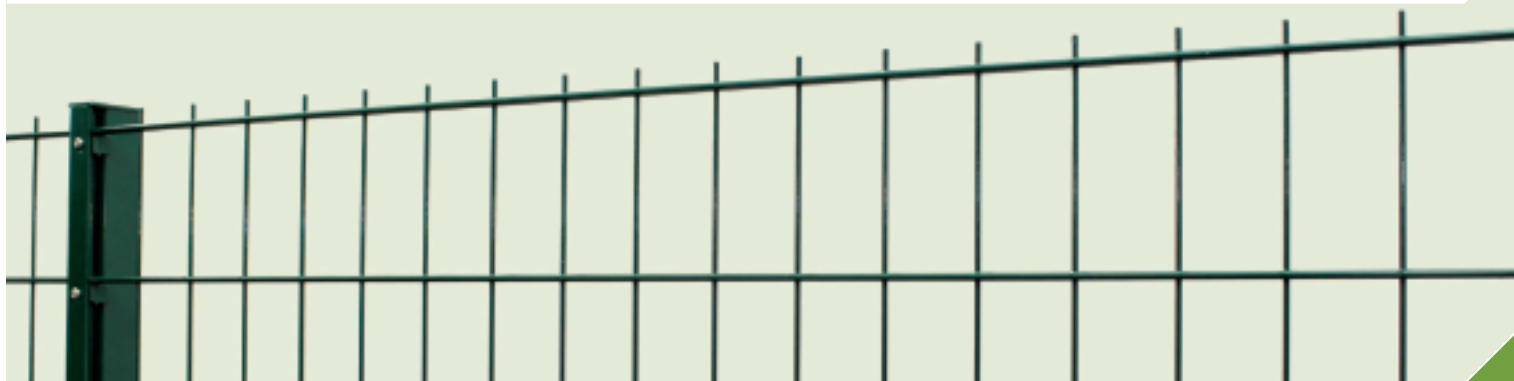

Double wire panel 8/6/8, mesh size 100 x 200 mm

The double wire panels excel both in stability and durability. This high quality is ensured by the use of top-quality materials and their careful processing using state-of-the-art production techniques. The double wire panel 8/6/8 (mesh size 100 x 200 mm) is the professional solution for setting up ball-stop fences up to 8 metres high. Combined with the classic double wire panel 8/6/8 (mesh size 50 x 200 mm) it ensures maximum security and functionality.

Technical specifications:

- Horizontal wires: 2 x ø 8 mm
- Vertical wires: 1 x ø 6 mm
- Length: 2,508 mm
- Height: see weight table
- Mesh size: 100 x 200 mm

Obviously, other sizes, mesh sizes and lengths are available at request.

Possible surface treatments:

- Self coloured
- Pre-galvanised wire with additional polyester powder coating
- Hot-dip galvanised according to EN ISO 1461
- Hot-dip galvanised according to EN ISO 1461 with additional polyester powder coating
- Standard colours: RAL 6005, 6009, 7016 & 9005, other colours available at request

- Ideal as ball-stop fencing
- All RAL colours available
- With or without excess length on top
- Durable
- Easy and fast assembly with our various fence post systems
- Variable height gradation for uneven grounds
- Can be easily combined with our doors and gates
- Very good price/quality ratio

Weight table

Height	Blank	Galvanised	Galvanised + coated
630 mm	10.3 kg	11.0 kg	11.3 kg
830 mm	13.1 kg	14.0 kg	14.4 kg
1,030 mm	15.9 kg	17.0 kg	17.5 kg
1,230 mm	18.7 kg	20.0 kg	20.5 kg
1,430 mm	21.5 kg	23.0 kg	23.6 kg
1,630 mm	24.3 kg	26.0 kg	26.7 kg
1,830 mm	27.1 kg	28.9 kg	29.8 kg
2,030 mm	29.9 kg	32.0 kg	32.9 kg
2,230 mm	32.7 kg	35.0 kg	36.0 kg
2,430 mm	35.5 kg	38.0 kg	39.1 kg